

---

## Proposal of an integrated 3D architectural survey method for application in historic agri-food building analysis and representation

Salvatore Praticò, Raimondo Tripodi, Viviana Tirella, Salvatore Di Fazio,  
Francesco Barreca, Giuseppe Modica

---

### Publisher's Disclaimer

E-publishing ahead of print is increasingly important for the rapid dissemination of science. The *Early Access* service lets users access peer-reviewed articles well before print/regular issue publication, significantly reducing the time it takes for critical findings to reach the research community.

These articles are searchable and citable by their DOI (Digital Object Identifier).

Our Journal is, therefore, e-publishing PDF files of an early version of manuscripts that undergone a regular peer review and have been accepted for publication, but have not been through the typesetting, pagination and proofreading processes, which may lead to differences between this version and the final one.

The final version of the manuscript will then appear on a regular issue of the journal.

*Please cite this article as doi: 10.4081/jae.2023.1521*

 ©The Author(s), 2023  
Licensee [PAGEPress](#), Italy

Submitted: 9/11/2022  
Accepted: 14/01/2023

*Note: The publisher is not responsible for the content or functionality of any supporting information supplied by the authors. Any queries should be directed to the corresponding author for the article.*

*All claims expressed in this article are solely those of the authors and do not necessarily represent those of their affiliated organizations, or those of the publisher, the editors and the reviewers. Any product that may be evaluated in this article or claim that may be made by its manufacturer is not guaranteed or endorsed by the publisher.*

## **Proposal of an integrated 3D architectural survey method for application in historic agri-food building analysis and representation**

Salvatore Praticò,<sup>1</sup> Raimondo Tripodi,<sup>1</sup> Viviana Tirella,<sup>1</sup> Salvatore Di Fazio,<sup>1</sup> Francesco Barreca,<sup>1</sup> Giuseppe Modica<sup>1,2</sup>

<sup>1</sup>Dipartimento di Agraria, Università degli studi 'Mediterranea' di Reggio Calabria; <sup>2</sup>Dipartimento di Scienze Veterinarie, Università degli studi di Messina, Italy

**Corresponding author:** Salvatore Praticò, Dipartimento di Agraria, Università degli studi 'Mediterranea' di Reggio Calabria, 89122 - Reggio Calabria, Italy.

E-mail: [salvatore.pratico@unirc.it](mailto:salvatore.pratico@unirc.it)

**Contributions:** SP: Conceptualization, Data curation, Investigation, Methodology, Software, Validation, Visualization, Writing - original draft, Writing - review & editing; RT: Data curation, Investigation, Methodology, Software, Visualization; VT: Data curation, Investigation, Methodology, Software, Visualization, Writing - original draft; SDF: Writing - original draft, Writing - review & editing; FB: Funding acquisition, Writing - review & editing; GM: Conceptualization, Data curation, Investigation, Methodology, Software, Validation, Funding acquisition, Visualization, Writing - original draft, Writing - review & editing.

**Conflict of interest:** the authors declare no conflict of interest.

## **Abstract**

In Italy historic agri-food buildings can be considered a relevant material expression and testimony of century-old agriculture and food processing practices handed down by generations. Recently they have gained ever-growing importance as a part of the wider architectural heritage. As such, they deserve dedicated general surveys to build a thorough knowledge of their distinctive characteristics and investigate their current condition, this way setting the basis for the implementation of planning and management actions for their sustainable valorisation. To this end, building information modelling (BIM) can be considered an efficient strategy to preserve construction information by creating 3D models based on surveys of the built heritage. To acquire in fast and accurate way geometric, reflectance and colour data of rural buildings, as 3D point-cloud, the terrestrial laser scanner (TLS) represents a powerful tool. The traditional TLS-based survey methods, in the context of historic agricultural buildings, have several limitations, mainly due to the presence of inaccessible parts and bulky machinery once used for processing and storage. In the present research, to overcome these issues and thus have a complete survey, we describe a proposal of an integrated methodology for obtaining 3D point-cloud data of existing rural agri-food buildings based on the integrated use of TLS, handheld scanner (HS), and unmanned aerial vehicles (UAV) instruments. The proposed methodology was tested in surveying three historic agri-food buildings and the accuracy of the obtained 3D point-cloud was calculated by means of the root mean square error (RMSE) on the X, Y, and Z alignment of the two different 3D point-clouds in correspondence of the used B/W target. Moreover, a measure of the distance between two merged 3D point-clouds, in their overlap area has been performed using the multiscale model to model cloud comparison (M3C2). RMSE analysis always shows values lesser than 1 cm and M3C2 shows values between 0 and about 6 cm.

**Key words:** 3D advanced surveying techniques; 3D point-cloud; Terrestrial Laser Scanner (TLS); Handheld Scanner (HS); Unmanned Aerial Vehicle (UAV); Historic Building Information Model (HBIM).

## INTRODUCTION

Historic buildings for the processing and storage of agricultural products represent a large and important part of the rural architectural heritage. They are today recognized as worthy of protection since they represent: an essential expression of the built vernacular heritage (ICOMOS, 1999); a testimony of the way of life and of the building tradition of past generations; a distinctive and characteristic component of the historic landscapes documenting the agricultural practices of a given region (Di Fazio and Modica, 2018); an important material heritage documenting the evolution of the technical knowledge and of the specific technology, machinery, methods and tools applied over time to food processing activities (Di Fazio, 1999).

In the South of Italy, among the historic buildings for agri-food production, flour mills, wineries, and olive-oil production facilities are the building types most represented. They often show formal and functional organizations inherited from the ancient Greek and Roman civilizations (Adam, 1999; Di Fazio et al., 1999) and have had a centuries-old continuity of use, thus becoming a precious document of the production techniques' evolution from ancient times to the present. Moreover, since wheat flour, wine, and olive oil have always had an essential role in the food culture and diet of the Mediterranean peoples, the buildings which supported their production present relevant sizes and thoroughly studied functional characteristics as a consequence of the economical relevance assumed (Cascone et al., 1997; Di Fazio et al., 1999).

Despite the wide recognition of their importance, historic buildings for agri-food production have not received yet as much consideration as they deserve. Several studies describe and help interpreting them from many points of view, but in many regions, it still lacks comprehensive knowledge based on extensive surveys of this heritage, enabling to produce material geometric surveys offering metric data and a detailed description of the building materials and the constructional systems used at different times, often stratified and overlaying in the same building. Because of the huge number of historic agri-food buildings deserving such kind of surveys, their widespread presence in large parts of the countryside, and the redundancy and neglect now threatening them, it is necessary to define innovative surveying methods coupling expeditiousness and precision, good detailing and economic affordability, advanced techniques and ease of application.

Many of the historic building facilities for agri-food products processing show a close relationship between the buildings themselves and the machinery there housed, often requiring a very complex architectural plan-altimetric organization. This, depending on functional reasons related to the processing needs and the energy sources used to drive the machinery, move the products through the processing areas and assure satisfactory indoor environmental conditions. In historic buildings such as wineries or olive-oil mills, for example, the need to transfer the product by gravity, as well as the clarification phase, required the altimetric articulation of the building into different floor levels, thus taking great advantage of sloping sites. In other cases, the use of water-driven machinery required an altimetric building and site organization, coupled with complex systems of water caption from the near streams and channeling works, thus producing sufficient kinetic energy from the positional potential (Cascone et al., 1997; Di Fazio et al., 1999).

For this kind of buildings the conventional surveying methods, based on the adoption of only one surveying tool to detect the whole area, show significant limitations depending on: the difficult accessibility and steepness of the building sites, often invaded by wild vegetation; the complex stepping articulation of the indoor space; the presence of historic and bulky machinery making the survey of building parts difficult and deserving themselves accurate detailed-surveying operations (Di Fazio et al., 2016).

In many Mediterranean countries, a number of historic agro-industrial buildings still are or can be effectively used either for the original function or for other alternative uses. Sustainability strategies encourage prolonging the functional life of the current building stock and the recovery and reuse of redundant farm buildings. In Italy, these often present characters corresponding to the application of the architectural sustainability principles: use of local natural materials; use of passive systems for indoor microclimate control; visual integration with the agricultural landscape; adaptation to the site landform; architectural forms corresponding to the local cultural tradition; etc. Moreover, today there is an ever-growing interest in recovering traditional rural buildings for cultural purposes (Picuno, 2012). Their role in promoting the touristic attractiveness of rural landscape is well recognized (Leanza et al., 2016), and the recovery of traditional buildings is to be preferred to new constructions because, especially in rural areas, these last are seen as one of the leading causes of landscape degradation (Garcia and Ayuga, 2007).

For many historic agri-food building facilities the continuity of use for production purposes, on the one hand has favoured their permanence, but on the other hand, has required continuous adaptation over time to meet the changing food processing and storage requirements (Barreca et al., 2017). Also, in these cases, accurate architectural surveys are needed to adequately address the reuse and conversion interventions according to compatibility and suitability criteria.

Based on metric survey documentation, thorough knowledge of the rural architectural heritage's current condition is fundamental for understanding its development and is a prerequisite to implementing planning and management actions for its sustainable valorisation (Poloprutský, 2018; Ruggiero et al., 2019). To this end, building information modelling (BIM) can be considered an efficient strategy to preserve the construction information by creating 3D models based on surveys either of the building as a whole and of its constituent parts (Ivanov, 2020; Osello et al., 2018). BIM is a computer-based process that, through 3D models, digitally represents and manages the main functional and physical characteristics of a building facility. The main feature of a BIM is the 3D geometry of the object to be represented (as-built or in-design), which is the basis for 3D modelling and for storing the information associated with it (Borrmann et al., 2018). Creating an as-built BIM parametric model is fundamental not only to engage in any type of new design (Volk et al., 2014), but also for developing detected building facilities management (Pärm et al., 2017). Therefore, a building is represented by a set of information describing different characteristics (geometry and dimensions, functional distribution, functional, constructional and technical elements, etc.), which, if well managed, can improve its performance (Chen et al., 2015). BIM strategy is mainly applied to under-construction buildings but is being increasingly used nowadays for conserving the already existing ones (Pocobelli et al., 2018). Arayici (2008) proposed adopting the BIM approach to refurbish a building in East Manchester. Since 2009, a specific methodology has been developed for the application of BIM in historic buildings, usually referred to as HBIM (historic building information modelling) (Murphy et al., 2009). Its potential application to a wide range of buildings and site of the cultural heritage (Bastem and Cekmis, 2022; Dore and Murphy, 2012; Logothetis et al., 2015; Moyano et al., 2021; Oreni et al., 2014) encouraged specific research worldwide (Zhao, 2017) and since the middle 2010s opened way to the development of HBIM open-source software, tools and cloud-based technologies (Diara, 2022; Diara and Rinaudo, 2018; Logothetis and Stylianidis, 2016). This determined a radical change in the approach to historic buildings' surveying, documentation, data storage and management, also in view of future interventions and with the advantage of better data accessibility and shareability (Diara, 2022).

One of the main inputs into the flowchart for obtaining an as-built BIM is data providing geometric

information about the building (or object) of interest. For this purpose, in the last two decades there has been a wide use of 3D point-clouds obtained from various sources. The ever-increasing application of this approach to historic buildings is documented by a recent scientometric survey carried out by Yang et al (2022) considering all the scientific articles in English present in the web of science database and concerning 3D point-cloud used in the cultural heritage field. It observed that since 2006 – the first year when the type of articles under consideration were detected (only 2) – the number of articles published per year shows an increasing trend, particularly remarkable in the period between 2016 (16 articles published in that year) and 2021 (68 articles) for which a total of 256 articles were found. The study, through a term co-occurrence and cluster analysis, also shows a major importance assumed by the term-cluster “historic building information” and help reveal that 3D point-cloud data is the main source of BIM and HBIM.

The growing scientific interest about 3D point-cloud shows a trend which in some ways corresponds to the technological progress, which in recent years has offered scientists and professionals a wide range of new devices, easy to use and able to generate this kind of data at a relatively low cost. Application to the surveying of buildings and sites with complex geometry or irregular shapes can benefit greatly from the integrated use of different 3D point-cloud data sources, both terrestrial and aerial.

To acquire in a fast and accurate way geometric, reflectance and colour data of rural buildings, the terrestrial laser scanner (TLS) technology represents a powerful tool. TLS allows the massive acquisition of 3D point-clouds with a high measurement accuracy (typically in the order of mm). Beyond 3D coordinates (X,Y,Z), TLS technology allows the acquisition of surface reflectance and, using integrated or external red, green and blue colour space (RGB) digital cameras, colour values are useful in obtaining texture information. In this way, for each surveyed point of the 3D point-cloud, it is possible to obtain and store up to 7 different parameters (X, Y, and Z coordinates, reflectivity value, and RGB colour values). This TLS-based 3D point-cloud is gaining attention from scholars interested in the conservation and management of cultural heritage buildings and sites (Di Angelo et al., 2018; Jo and Hong, 2019). In the broad context of the survey of historical monuments, many studies use TLS for 3D surveys (Moyano et al., 2022). Quattrini et al. (2015) adopted a TLS-based 3D point-cloud approach to survey the Romanesque period church of Santa Maria in Portonovo (Italy), which is considered a high-quality Italian heritage monument. Santagati et al. (2019) performed a TLS-based survey as the basis to obtain the BIM of St. John cathedral in Nicosia (Cyprus).

Unlike the mentioned cases applied to historical monuments, all the historic agri-food buildings often house bulky machinery, plants, and furniture once used for food processing and storage. Furthermore, they usually present a complex spatial organization where the geometry and topological succession of spaces immediately descends from the processing flow scheme and closely relate to the site’s landform and energy use. In the case of these complex objects, several scans from different station points (SPs) are generally required to survey their entire architectural envelope, obtaining a complete 3D point-cloud. Nevertheless, the presence of processing machinery and furniture in the surveyed space generates occlusions (i.e., shadow areas that determine missing data) and clutter of background surfaces that should be considered since the early stages of the survey design and planning.

TLS-instrument’s limitations are mainly due to the indoor space’s complexity and the occlusions and clutter of surfaces placed behind (Adan and Huber, 2011), which determine the loss of data in the generated 3D point-cloud. A simple way to create complete surveys, trying to avoid or reduce data loss, can be pursued with the intensification of the number of TLS SPs, bringing to the consequent

increase of survey time and data redundancy. Several algorithms and techniques have been implemented to filling holes in the post-processing-phase as analysed by several scholars in recent years (Adan and Huber, 2011; Dumitru et al., 2013; Salamanca and Cerrada, 2012), but it is worth observing that the resulting 3D point-cloud can be still incomplete.

A way to obtain a complete survey without increasing the number of SPs is to integrate the TLS data with 3D point-clouds derived from other surveying instruments (Mill et al., 2013), such as handheld scanner (HS) systems. HS is a portable 3D scan system using photogrammetry to obtain a 3D point-cloud reconstruction of the investigated scene (Givi et al., 2019). HS tools have been used, in several research fields, for the detection of details of small objects, such as jars (Kaneda et al., 2022) or human bones (Probst et al., 2022) and parts of bodies (Xia et al., 2019). Saptari et al. (2022) proposed a combined use of TLS and HS in surveying a temple in Bali. They performed a TLS survey of the inner areas of the temple and used HS to scan the details of one of the statues at the temple's entrance. As a portable solution, HS can be used in agri-food environments to survey the surfaces not detected by TLS because of obstacles on the scene. HS can also help survey the machinery present on the scene.

A further limitation of the traditional agri-food buildings survey with TLS is the difficulty in obtaining an accurate survey of the roof, highest faced parts and other inaccessible areas of the detected building (Yang et al., 2022). To address this issue, integrated surveying solutions based on TLS and unmanned aerial vehicles (UAVs) are largely proposed in the literature (Achille et al., 2015; Chatzistamatis et al., 2018; Cheng et al., 2013; Chiabrando et al., 2016; Rocha et al., 2020; Ursini et al., 2022; Xu et al., 2014). UAVs are remotely piloted platforms used for several applications like precision agriculture (Messina et al., 2021; Modica et al., 2021), forestry (De Luca et al., 2019; Solano et al., 2022), protected landscapes (Cucchiario et al., 2020), soil erosion (Meinen and Robinson, 2020), including surveying of cultural heritage and rural buildings (Bakirman et al., 2020; Martínez-Carricondo et al., 2020; Vacca et al., 2017). UAVs use a photogrammetric technique based on structure from motion (SfM) algorithms (Westoby et al., 2012) to obtain a 3D point-cloud starting from aerial pictures.

Integrating data from different sources and collected with different techniques, i.e., a data fusion process allows for more detailed and valuable information on the object of the survey (Lawrence, 2012).

In the present research, we describe a proposal for an integrated methodology for obtaining 3D data models of existing rural agri-food buildings based on advanced geomatics techniques and the contextual use of TLS, HS and UAV instruments. *The integration of three geomatics techniques allow the scholars to analyse in detailed manner the complex geometry also of hardly accessible rural buildings.* The raw data are suitable for creating a parametric 3D model of the surveyed buildings. This information, based on a parametric library of objects (Murphy et al., 2013), constitutes the first stage in implementing a 3D HBIM (Murphy et al., 2009; Poloprutský, 2019). Moreover, the proposed methodology is dedicated explicitly to historic agri-food buildings, either maintaining their original function or converted to alternative uses. Unlike the different solutions proposed by scholars, fundamentally based on the use of software algorithms to generate the missing data model (Müller et al., 2006; Thomson and Boehm, 2015), the method here proposed and presented does not entail that TLS point-clouds are integrated with UAV-derived point-clouds to detect the roof and to avoid occluded and clutter surfaces. TLS SPs are instead integrated with HS surveys since the survey project phase. Moreover, HS led to surveying tight spaces with a different technology capable of generating 3D point-cloud, merged with the TLS one. The main aim is to obtain a complete 3D point-cloud,

which can be used as a basis for the construction of the BIM for the technical documentation and management of agri-food buildings.



## MATERIALS AND METHODS

The acquisition of dimensional data of historic agri-food buildings needs careful planning of the *in situ* surveys. To this end, the pre-survey project is a crucial part of the whole process since it affects the fieldwork duration and the accuracy and completeness of collected datasets. *Our proposed method, synthesised in the workflow shown in Figure 1, pays much attention to the survey project phase regarding both instruments' setting and positioning and target typology and placement.*

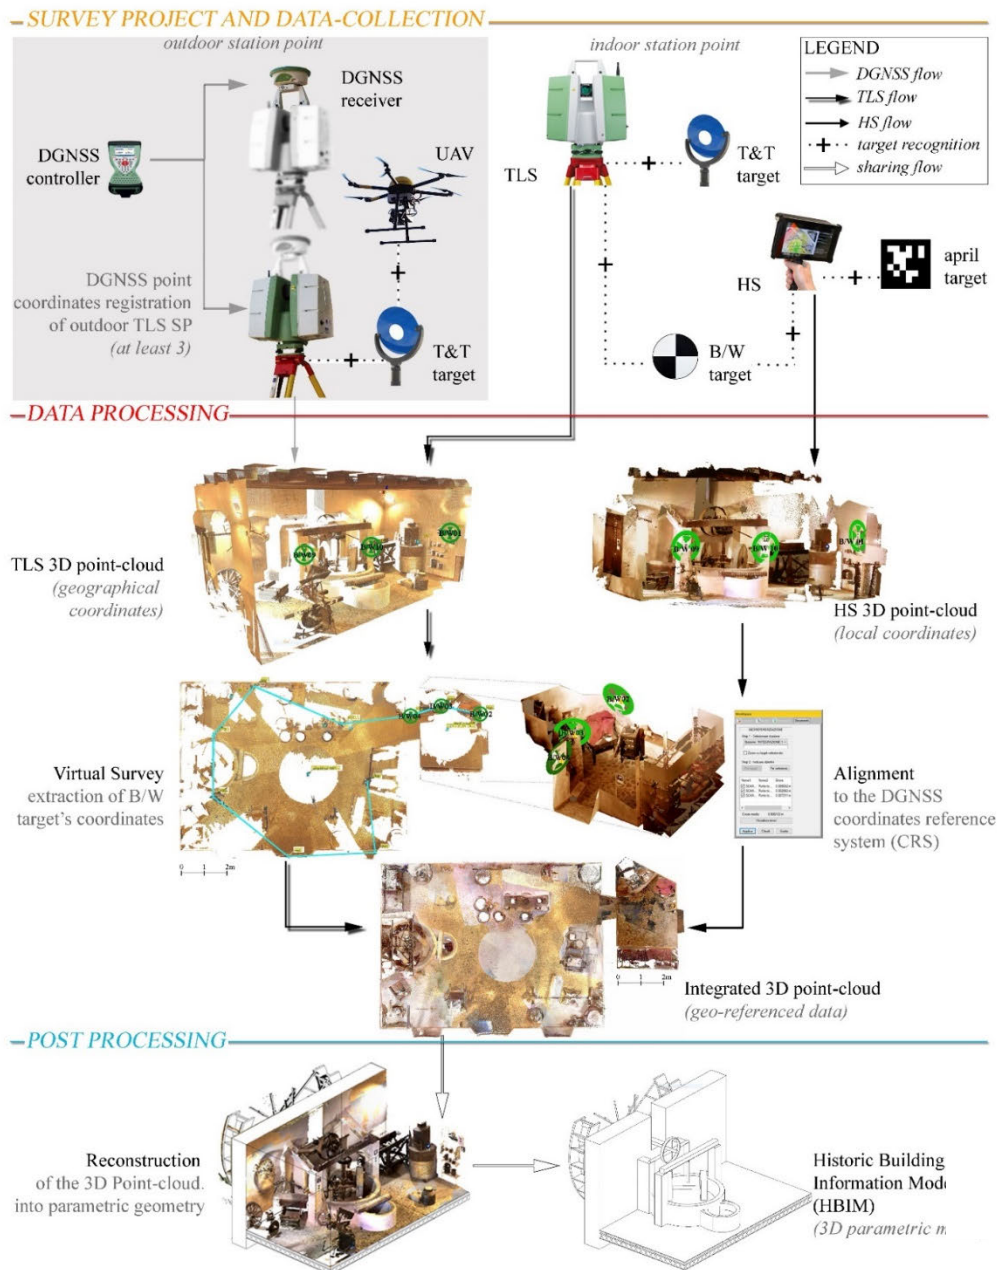


Fig. 1. Flowchart of the proposed integrated 3D Survey method. Three main steps are singled out: *Survey project and data collection*, based on terrestrial laser scanner and hand-held scanner surveys coupled with differential global navigation satellite system surveys (DGSS); *Data processing*, mainly dealing with registration, alignment, and co-registration of terrestrial laser scanner and hand-held scanner 3D point-clouds; *Post-processing*, devoted to obtaining a 3D parametric model.

## CASE-STUDIES

The proposed method was tested in three historic olive-oil mills (B1, B2, B3) located in the Province of Reggio Calabria (Calabria Region - Southern Italy). They are particularly representative of the rural architectural heritage of the area and are an important material document of the technological transition that occurred between the late 18<sup>th</sup> and early 19<sup>th</sup> centuries (Di Fazio, 2008; Mazzotti, 2004) when the primary power source driving the machinery used in these agri-food buildings passed from human/animal power to water kinetic energy (Fig. 2). Moreover, these buildings represent three different present conditions of use: continuity of use for the original function with adequation of the building and the machinery to present functional requirements; conversion to cultural uses and services related to the promotion of olive-oil production and rural tourism in the region; redundancy and partial disuse, only some parts of the building complex being used as storage areas for various materials.

The first building surveyed (B1) is located in “Modi” district in the municipality of Gerace. It was built in the 19<sup>th</sup> century and shows typological and constructional characteristics coherent with the local tradition. The building envelope presents rubble masonry load-bearing walls, a longitudinal timber roof structure supported by masonry arches, and a pitched roof covered by pantiles. Various spatial remodelling and constructional transformations interested the building over time. In particular, the indoor space was modified to ensure the correct layout of the new olive oil machinery. The second building (B2), today housing an olive oil museum and a restaurant, is located in the municipality of Bagaladi. It has a built volume of about 2000 m<sup>3</sup> distributed in 2 floors. On the ground floor, there are office rooms, toilets, a restaurant with kitchens, and a conference room; on the basement, there is a museum of ancient agricultural instruments. An artificial canal conveys the water of a river towards the centre of the building. With a diameter of 5 meters, a wooden wheel moves two stone millstones that lie, one on the ground floor and the second in the basement. The third building (B3) dates back to the first half of the 19<sup>th</sup> century and is located in the countryside of San Giorgio Morgeto. Its spatial and functional organization follows the proposals presented by Marquis Domenico Grimaldi in a book published in 1773, to promote the rationalization and innovation of the olive oil industry in Calabria (Grimaldi, 1773). This olive oil mill is characterized by a huge rectangular processing space that houses at different levels: water-driven olive crushers, a battery of presses so-called “alla Genovese” (with a single central screw), and a series of stepping clarification tanks.

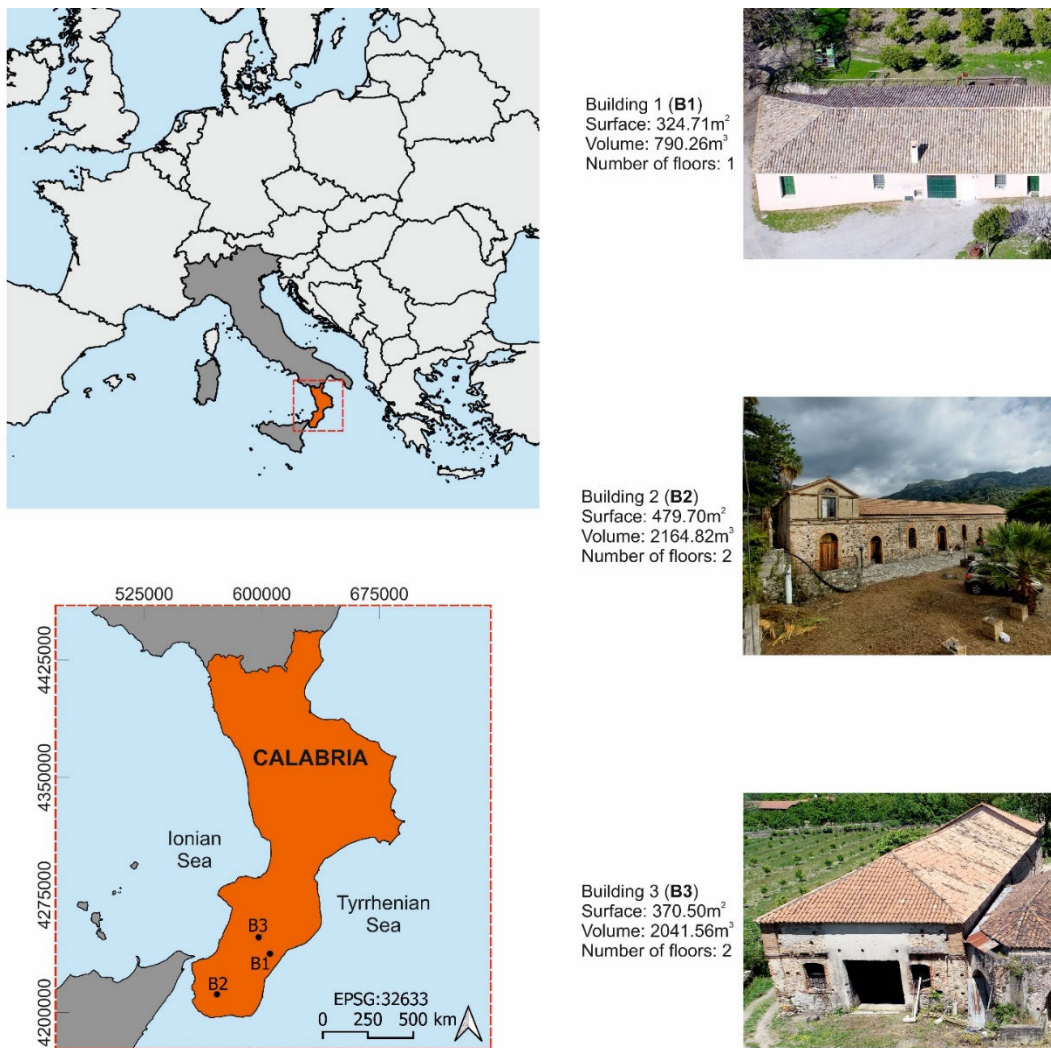


Fig. 2. The geographical location of the three investigated historic olive-oil mills.

## Data collection

### TLS point-cloud

TLS 3D point-cloud was obtained using a Leica ScanStation C10, a short-range time of flight TLS with a 360° (horizontally) x 270° (vertically) field of view (FoV), a maximum scanning speed up to 50,000 points per second and characterised by high positional accuracy. For distances up to 100 m, the systematic error of C10 does not exceed 3.7 mm (Antanavičiūtė et al., 2013). C10 uses a green pulsed laser (532 nm of wavelength) for point coordinates detection and an integrated 4-megapixel RGB camera to acquire colour information for each point.

The instrument needs different SPs, that must be connected to each other by tilt and turn (T&T) targets. Additionally, it is also possible to detect the relative and/or absolute positions of black and white (B/W) targets in the software environment.

TLS surveys were conducted by combining 3D points data with RGB information derived from the integrated camera. For each SP, before starting the points' acquisition, the instrument was perfectly levelled, and a topographic nail was applied on the ground to allow the replicability of the survey. After this, a complete 360°x270° scan window was surveyed at the maximum resolution, which needs

about 20 minutes to collect points together with images. Moving from a SP to the following one, we ensured that at least three common T&T targets were detectable from both SPs. After each acquisition, the data collected was visually checked directly on the scan station screen for a quick look at the surveys quality. At the end of the surveying campaign, all surveyed 3D point-clouds were combined in a single cloud through T&T targets. Moreover, to improve the repeatability of measures in multitemporal surveys, for each outdoor SP, the absolute coordinates were acquired using the Leica GS12 as Real-Time Kinematic (RTK) GNSS, and a survey point nail was used as a permanent marker.

### **HS point-cloud**

The Trimble portable HS DPI-8 was used to scan all those areas occluded in the TLS surveys. DPI-8 captures 3D colour data in a 5cm to 60cm distance range with a horizontal FOV of 57.5°. This HS permits real-time feedback on data quality, thanks to the Phi.3D software that shows in green the most accurate points detected, in yellow the points with lower accuracy, and in grey all the other areas of the detected scene. According to Trimble specifications, it has an operational range spanning between 0.6m and 5.0m. The measuring procedure is based on a structured light speckle pattern provided by an infrared (IR) and RGB PrimeSense sensor integrated with a powerful Android 8" tablet that allows having a scanning system in just one hand. The user must manually move the HS between tasks and pick up where it left off, moving through its own target, the April-target. During a typical HS survey, scans are pre-registered via an iterative closest point (ICP) algorithm (Besl and McKay, 1992).

HS surveys were conducted to integrate those areas that were difficult to reach with the TLS. Moreover, HS was used to survey detail of the historic machinery present in the scene (e.g., olive stone-mill crushers, old presses, water-driven motion wheels, etc.). Before each HS survey, the instrument needs time to calibrate the sensors. Once it is ready to scan, for each detected scene, the operator moves slowly, ensuring to acquire all data with the highest accuracy and collecting several April-targets, needed to reconstruct the acquired geometry and several B/W targets that will be used in the following co-registration step. After each survey, the collected data are pre-processed and visualised as 3D reconstruction directly on the tablet to check the survey's quality quickly.

3D point-clouds generated by HS surveys were combined with those obtained from TLS surveys. This process requires linear environmental conditions, as the photographic sensor's characteristics work directly on a digital output signal and are more sensitive to noise.

### **UAV point-cloud**

For the UAV-based aerial survey was used a DJI Phantom 4 Pro+, a quadcopter multicopter solution with an integrated RGB camera. The equipped sensor is a 20-megapixel 1" CMOS global shutter with a field of view (FoV) of 84° (<https://www.dji.com/it/phantom-4-pro/info#specs> – last access 28/06/2022). UAV-based surveys were conducted using the flight planning app Pix4Dcapture (<https://www.pix4d.com/product/pix4dcapture> - last access: 30/06/2022) to plan the nadir acquisition according to a double grid drone path at a mean altitude of 50m above ground level. To ensure a high resolution survey, an overlap area of 80% and a speed of 2.5 m/s were set during the planning step. As far as oblique acquisitions are concerned, however, a freehand flight was carried out. A professional UAV pilot has performed each mission, and, to ensure safety, the detected area was fenced, avoiding other people's presence. For both planned and freehand flights, the pilot has performed the take-off and landing operations with manual UAV control. In order to improve the georeferencing of the acquired images, a set of easily detectable 50cm x 50cm B/W panels distributed all along the surveyed areas were used as ground control points (GCPs). For each GCPs, the absolute

coordinates were acquired using the same RTK-GNSS system for the outdoor TLS SP. The entire post-flight processes needed to obtain the 3D point-cloud from the UAV pictures were conducted in Pix4Dmapper Pro 4.3 (Pix4D SA, Switzerland). This software allowed, through SfM algorithms, to obtain a 3D point-cloud and an orthophoto starting from the UAV aerial images. The 3D point-cloud was finally exported in \*.las format and co-registered with the TLS and HS ones.

## **Data-processing: registration, co-registration and georeferencing of 3D point-clouds**

### **Registration (only TLS)**

The registration process involves only the TLS surveys and refers to fitting all 3D point-clouds obtained from different SPs to a single 3D point-cloud.

Before their registration, to remove the points extraneous to the scan scenery, raw 3D point-clouds were filtered using a distance criterion approach fixing a threshold of 50m.

The registration of TLS 3D point-clouds is typically performed using one of the following methods (Abellán et al., 2014): point-to-point, feature-based and target-based. Currently, the most common registration practice in TLS surveying refers to the target-based method (Fan et al., 2015). This method needs a precise detection and survey of several targets, at least three for each SP. It is a time-consuming method, but better final accuracy is ensured compared to the other two. In the proposed workflow, a target-based method was chosen for the registration of TLS 3D point-clouds, by means of a *T&T target*. *Different 3D point-clouds with at least 3 T&T targets in common were merged using these targets as snapping points.*

### **Co-registration**

The co-registration, i.e., the registration of different data sources outputs (Granshaw, 2016) is the process of merging all surveyed data of the same scenery, captured from different sources, using a surveyed 3D point-cloud as reference. The co-registration process is a prerequisite to ensure the quality of all following 3D modelling and analyses.

To perform the co-registration, a sufficient overlap among different scans (i.e., an overlapping surface between the different surveys) is needed.

The 3D point-cloud co-registration has been investigated for more than 20 years; several solutions have been proposed, which can be classified mainly into two macro-groups: on the one hand, the *sparse methodology* that operates on significant points of the surveyed scene to unite different surveys; on the other hand, the *dense methodology* that operates, instead, on the entire survey (Serafin and Grisetti, 2017). The ICP is the technique used for 3D point-cloud registration in the sparse approach. In order to apply the ICP technique, a superposition of homologous and recognisable surfaces is required. Using the ICP approach to merge the 3D point-cloud from TLS with that from HS and UAV is a challenging operation, as the surveyed surface portions to be merged offer limited areas of overlap. Unlike other experiences in which TLS and 3D point-cloud co-registered through the ICP algorithm (Mandelli et al., 2017), we propose an approach based on targets to improve the obtained accuracy. A modified target-based registration is adopted in our methodology to co-register different 3D point-clouds, introducing a simple way to reduce the time survey. The adopted methodology allows the co-registration of the different 3D point-clouds using common targets, detectable at least by two different surveying tools. To this end, two target types (Fig. 3) are used: circular 6-inch blue and white *T&T target with high reflectivity, detectable both by TLS and UAV* and squared 6-inch B/W target detectable both by TLS and by HS. At the end of this step, a global co-registered 3D point-cloud has been produced, merging the different 3D point-clouds obtained by TLS,

HS, and UAV surveys.

### Georeferencing

The georeferencing step transforms the obtained global 3D point-cloud from a local coordinate system (CS) into an absolute one. Typically, the conversion from a local (Cartesian) to an absolute CS involves a translation (i.e., shift in X, Y, and Z measurements) and a rotation (separate rotations around X, Y, and Z axes could be necessary) (Heritage and Large, 2009) with respect to reference points and a defined coordinate system.

The global 3D point-cloud was georeferenced using the coordinates acquired with Leica GS12 RTK GNSS employing GCPs and outdoor SPs positioning, respectively. The GNSS antenna was directly mounted on top of the TLS to obtain the SPs' X, Y, and Z coordinates. The coordinates were acquired in WGS84/ETRF1989 UTM33N (EPSG: 32633) as a coordinate reference system (CRS) with a planimetric accuracy of  $\pm 2.5\text{cm}$  and a  $\pm 5\text{cm}$  accuracy for the elevation. According to our proposed flowchart, at least the position of three SPs of known coordinates and four GCPs are required to transform the coordinates of the 3D point-cloud from the local CS to the absolute one.

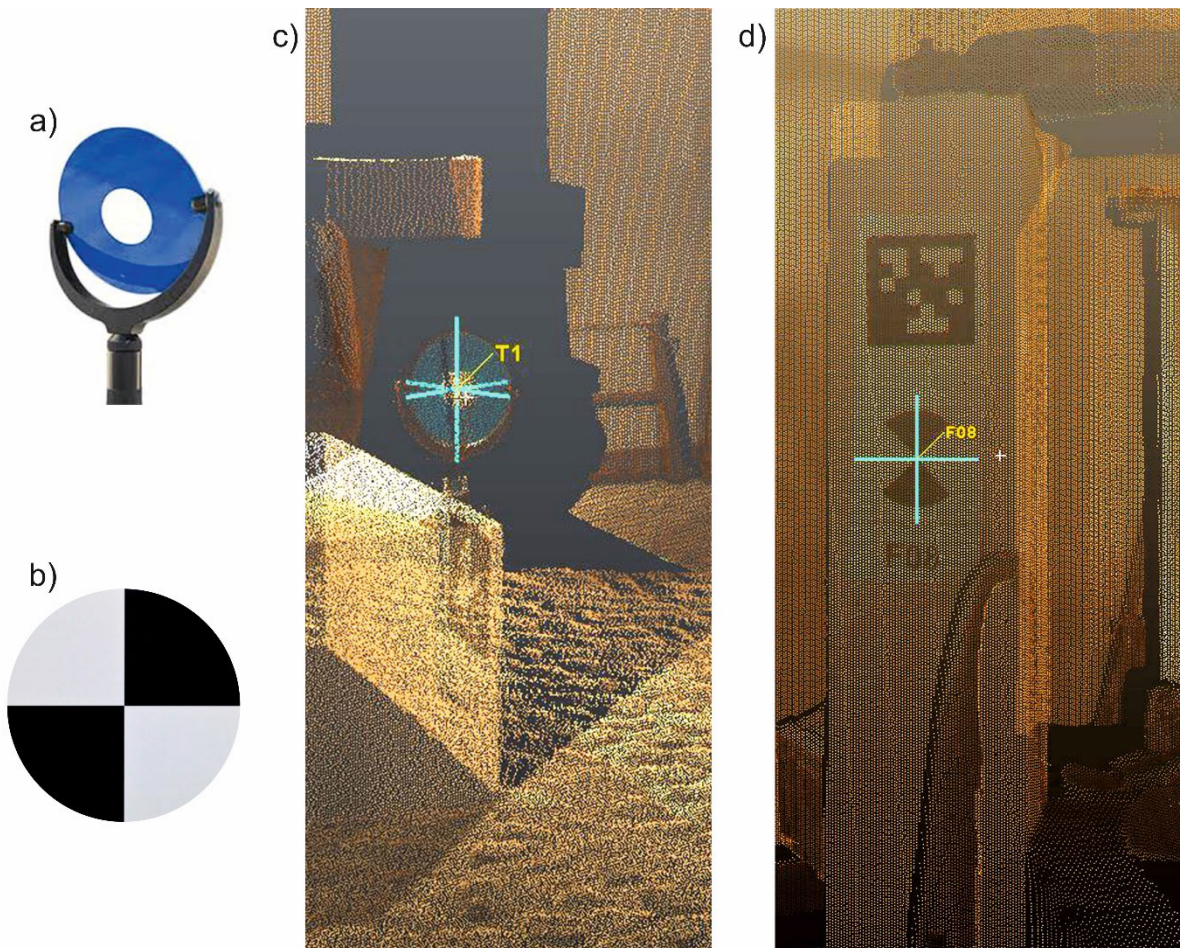


Fig. 3. a) 6-inch Tilt and Turn (T&T) target used to integrate terrestrial laser scanner (TLS) and unmanned aerial vehicle (UAV); b) 6-inch Black & White (B/W) target used to integrate TLS and handheld scanner (HS); c) 6-inch T&T target into the detected scene; d) 6-inch B/W target into the detected scene.

### **Accuracy assessment**

To evaluate the goodness of the co-registration process, the accuracy was calculated on the one hand, by means of the root mean square error (RMSE) on the X, Y, Z alignment of the different 3D point-cloud in correspondence of the used B/W target and on the other hand, measuring the distance between the merged 3D point-cloud, in several overlap areas. This approach, known as cloud to cloud (C2C) method, preserve the geometry of the 3D point-cloud, measuring changes along directions that are unique for each point, avoiding computing distance just along an axis (Williams et al., 2021). In our proposed method, we used the multi-scale model to model cloud comparison (M3C2) (Lague et al., 2013) to compute differences in distance between different sources 3D point-cloud. M3C2 is often used to compute differences between 3DCPs of the same object surveyed at different times. It is mainly used to monitor natural hazards like landslides (Stumpf et al., 2015) or cliff erosion (Warrick et al., 2017). It operates directly on a 3D point-cloud, highlighting a set of core points (Brodu and Lague, 2012) on which calculate their distances along normal direction, so no point gridding is needed (Schürch et al., 2011). At the end of the process, the distance between the points of the two investigated clouds is indicated. This analysis was conducted for each investigated building by means of the M3C2 algorithm implemented into the free software CloudCompare (<https://www.danielgm.net/cc/> – last access 05/10/2022). In performing this analysis, we chose the 3D point-cloud derived from the TLS survey as a reference because of its widely recognised reliability (Rodríguez-Martín et al., 2019; Russhakim et al., 2019)

### **3D modelling**

At the end of the proposed method, once the obtained accuracy of the global 3D point-cloud was tested, 3D modelling of surveyed data was performed to test the applicability of the obtained 3D point-cloud as a geometry basis for elaborating the BIM/HBIM. The 3D point-cloud was imported into Autodesk Recap<sup>®</sup> software and converted into \*.rcp file format to be processed in the Revit<sup>®</sup> environment. Autodesk Revit is a BIM software supporting 3D point-cloud, commonly used for BIM/HBIM *as-built* production (Fryskowska and Stachelek, 2018; Murphy et al., 2013). It is possible to create the most commonly used parametric objects in the Revit environment like windows, walls, doors, etc. (Banfi, 2019). In this work, Autodesk Revit was used with the aim of creating 3D parametric models of the surveyed geometry.

## RESULTS AND DISCUSSIONS

The proposed method allowed to obtain, for each study case, two main results: i) an integrated 3D point-cloud, derived by merging the data obtained by the different used sources (i. e., TLS, UAV, and HS) and ii) a 3D reconstruction of the 3D point-cloud into parametric geometry that can be implemented by information (e.g., thermal or energy) which can serve as bases for BIM/HBIM processing.


The characteristics of each 3D point-cloud, obtained from different surveys, are synthetized in Table 1

**Table 1** – Main characteristics of 3D point-cloud obtained from the surveys for each instrument adopted (i.e., Terrestrial Laser Scanner – TLS, Handheld Scanner – HS and Unmanned Aerial Vehicle – UAV) and each building surveyed

ID	TLS Survey		HS Survey	UAV Survey	
	n.o of SPs	n.o of points	n.o of points	n.o of images	n.o of points
<b>B1</b>	17	40,244,976	172,008,044	224	2,624,128
<b>B2</b>	49	426,381,327	219,691,685	252	2,352,781
<b>B3</b>	21	153,677,377	171,928,478	280	2,081,434

Figure 4 shows the result of the interaction between TLS- and HS-surveyed 3D point-clouds. On the left side of the picture (Fig. 4a), the darkest 3D point-cloud refers to the TLS survey and the lightest one to the HS survey. As can be noticed, the HS 3D point-cloud covers all parts not surveyed by TLS, having a complete 3D point-cloud of the entire area. On the right side of the picture, we can see the 3D point-cloud of a millstone surveyed with the TLS (Fig. 4b) and the 3D point-cloud of the same millstone after the integration between the TLS and the HS 3D point-cloud (Fig. 4c), highlighting how the merging of different 3D point-cloud is useful to obtain a complete survey of machinery in order to perform their parametric reconstruction.




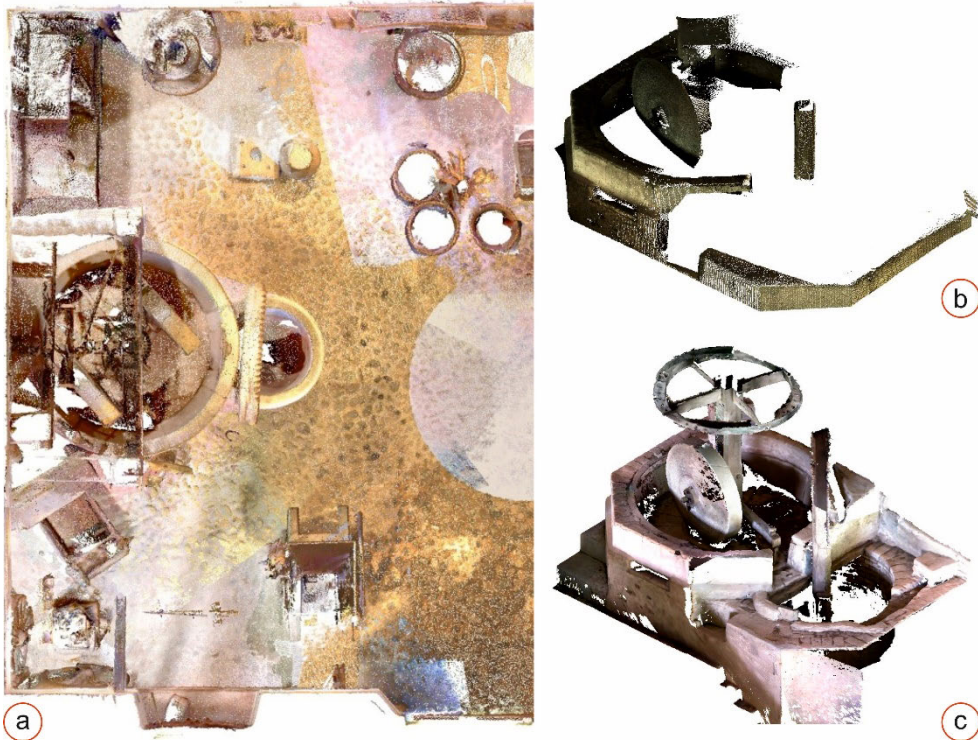

**Fig. 4** - Example of merged 3D point-cloud provided with reference to building 2 (a). 3D point-clouds (3D point-cloud) of a water-driven olive millstone surveyed with the terrestrial laser scanner (TLS) (b). 3D point-cloud of the millstone after the integration between TLS and handheld scanner (HS) 3D point-cloud (c).

For each integrated 3D point-cloud, the differences between the TLS 3D point-cloud, used as a reference because of its widely recognised reliability (Ingman et al., 2020), and the HS 3D point-cloud alignment have been evaluated. RMSE values fall in a range between 0.3 and 5.4mm. In Figure 5, the RMSE values in X, Y, and Z, are reported for the three analysed buildings.


The RMSE values highlight a good alignment between TLS and HS 3D point-cloud. The obtained values are comprised in a sub-centimetre range. These errors, although acceptable, may be due to micro-movements that the TLS may undergo during the surveying operations due to the flooring of the buildings surveyed, which in this kind of historic rural productive buildings, is often irregular. Also fast movements of HS during the acquisition process can lead to the misregistration of scanned points, thus affecting the data quality.

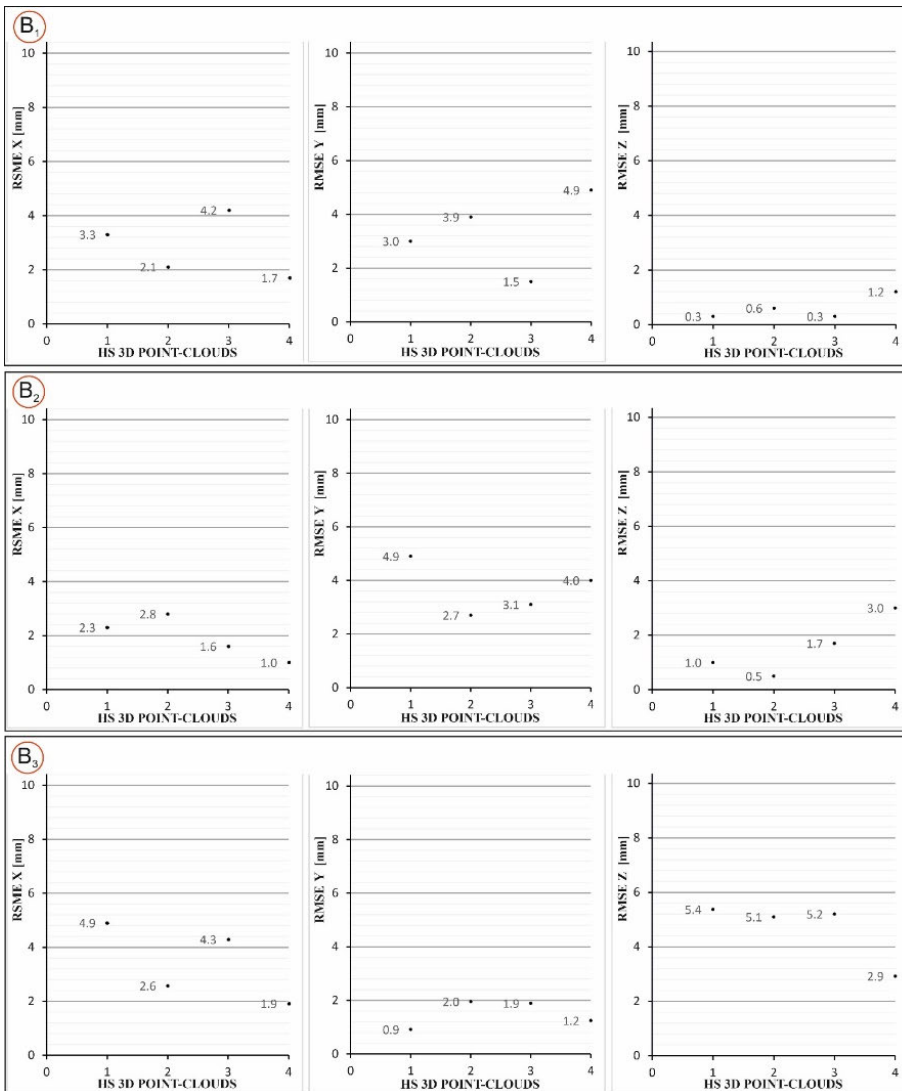


**Fig. 5** – Root mean square error (RMSE) of X, Y, and Z positions of the handheld scanner (HS) 3D point-cloud against terrestrial laser scanner (TLS) 3D point-cloud alignment in correspondence of 4 black and white targets for each of the surveyed building

The accuracy was also analysed in the overlap area between the TLS 3DCP and the HS 3DCP, and the respective distances were calculated by adopting the M3C2 algorithm. The analysis has been conducted in a sample zone for each investigated building in an area characterised by the integration of the two clouds. Figures 6, 7, and 8 show the result of the analysis. The distance between the TLS 3D point-cloud and HS 3D point-cloud ranges between 0, which means a perfect correspondence, and 18 cm in the most marginal parts of the merged cloud. This could be due to the HS FOV, which does not allow precise acquisition of objects falling in the outer areas of the frames. These marginal areas are not the main objective of the integration because they are present in the TLS cloud, so they can be not considered. Considering the central part of the integration (i.e., those areas connecting the overlapping clouds with the solely HS 3D point-cloud) it can be noticed as the distance between the two surveys ranges from a maximum value of 0.06m in B1 and B2 buildings and sub-centimetre values in B3. These values represent a good compromise between the accuracy and expeditiousness of the survey considering that to have a complete survey using only the TLS, a congruous number of SP is required, and often, they will not be sufficient to cover all areas and/or to survey the roof of the


buildings. Moreover, in this way, it is possible to have a detailed survey of the productive machinery present on the scene, which characterise these historic agri-food buildings.

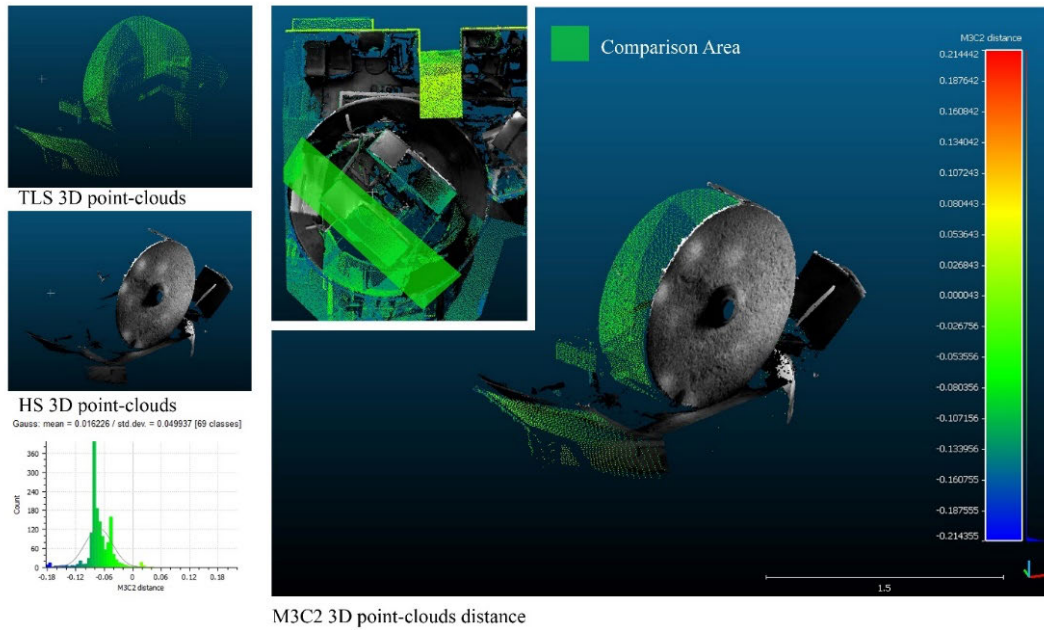

**Fig. 6** - Multi-scale model to model cloud comparison (M3C2) result for Building 1 (B1) sample.




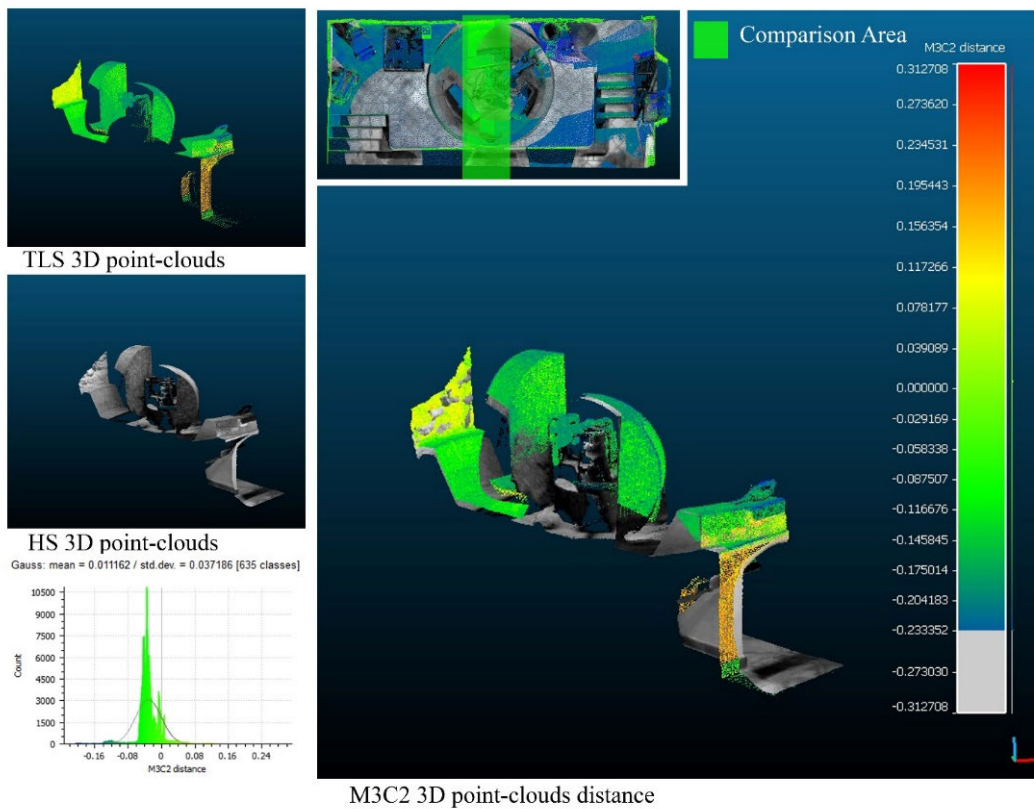


**Fig. 7** - Multi-scale model to model cloud comparison (M3C2) result for Building 2 (B2) sample.

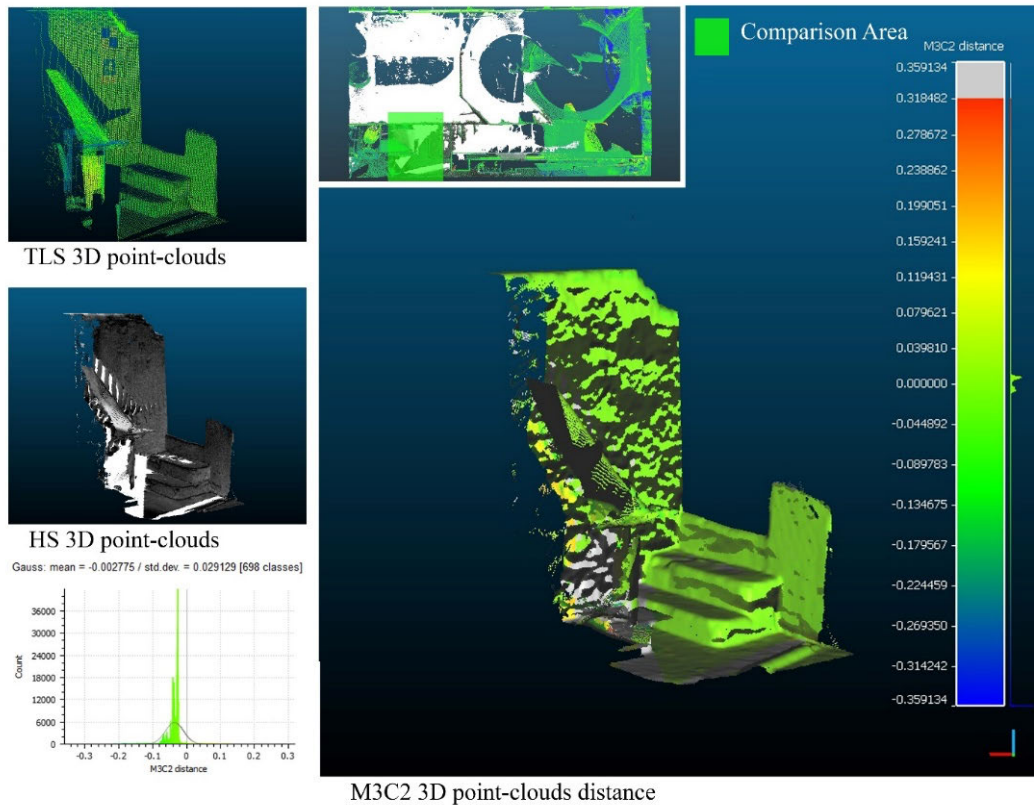

**Fig. 8** - Multi-scale model to model cloud comparison (M3C2) result for Building 3 (B3) sample.

The analyses of the obtained results, jointly with a trial-and-error approach during the surveying process, highlighted a similar behaviour of the HS 3D point-cloud with local coordinates. A more homogeneous distribution of points was shown for those located short distances from the operator. In contrast, a more significant error in the distribution was shown in the more distant areas. This allowed us to define an optimal HS distance for the acquisition, which falls between 0.3m and 1.5m. Concerning the modelling step, the highly accurate survey, performed with the proposed method, allows obtaining a database on which to develop a re-modelling and a subsequent project, as well as operating the management of the building manufacturing and machinery present in it (Figure 9).

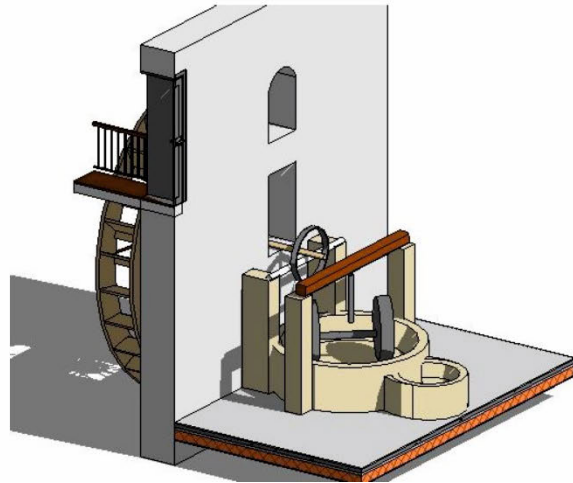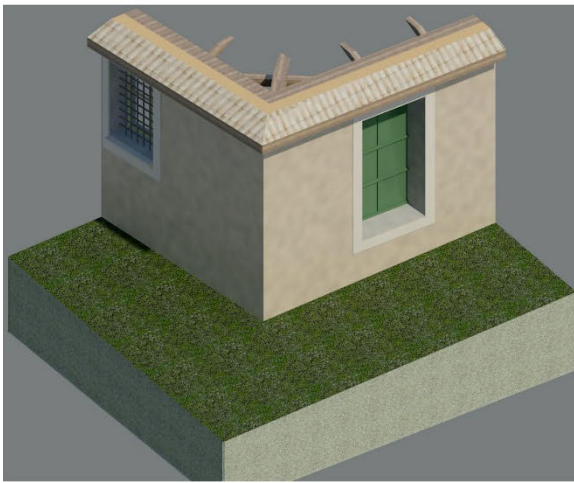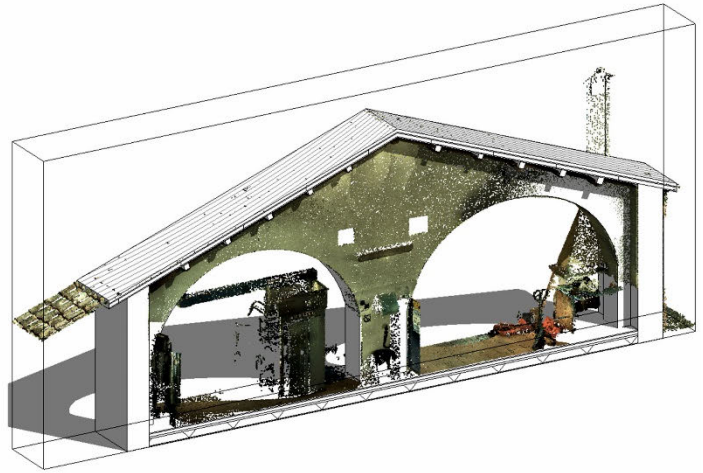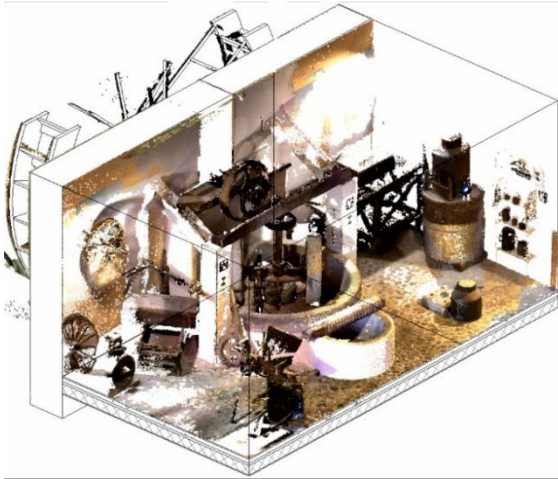

**Fig. 9** - Top: 3D point-clouds modelled into Autodesk Revit® environment. Bottom: example of parametric objects obtained from modelled 3D point-cloud.

## CONCLUSIONS

The presented research aimed to obtain a complete 3D point-cloud capable of serving as a geometric basis to obtain an as-built HBIM/BIM of historic agri-food buildings, integrating the 3D point-clouds obtained from three different surveying tools: TLS, HS, and UAV.

Portable scan solutions, like HS, can represent an optimal supplement to TLS provided that the survey, to ensure a good quality of the obtained 3D point-cloud, is performed by experienced users with slow and homogenous movements. The HS and UAV integrations to the TLS 3D point-cloud offer a complete and reliable dimensional datum that allows obtaining a complete 3D point-cloud, even in those areas difficult to reach with a traditional TLS survey.

The surveying method proposed for agri-food buildings allows obtaining important information otherwise unavailable and other categories of rural buildings, particularly for the vernacular ones for which historical documentation and metric drawings (plans, sections, elevations) often lack. For these kind of buildings, many of which are threatened and risk disappearance, a complete, accurate and expeditious architectural survey – as proposed in our research with integrated geomatic techniques – allows preserving their memory better. Moreover, for the whole stock of historic agricultural buildings, it helps to adequately address their management as a part of comprehensive strategies for the protection and creative valorisation of the rural built heritage.

The proposed method provided complete geometrical and geo-referenced data, which are very important for future analysis. The modelling phase can represent a point of weakness. The obtained 3D point-cloud, once imported into REVIT, behaves like a tracing sheet so the modelling accuracy depends solely on the precision and attention of the operator.

Moreover, more focused analyses with specific tools allow obtaining data helpful in elaborating the so-called Building Energy Model (BEM) by adding the thermal behaviour of building components. This model allows for carrying out dynamic simulations of the thermal conductivity of the building envelope and energy analyses.

### *Main Abbreviations*

<b>B/W</b>	Black & White
<b>BEM</b>	Building Energy Model
<b>BIM</b>	Building Information Model
<b>GNSS</b>	Global Navigation Satellite System
<b>HBIM</b>	Historic Building Information Model
<b>HS</b>	Handheld Scanner
<b>RMSE</b>	Root Mean Square Error
<b>RTK</b>	Real Time Kinematic
<b>SfM</b>	Structure from Motion
<b>SP</b>	Station Point
<b>T&amp;T</b>	6-inch Tilt and Turn target
<b>TLS</b>	Terrestrial Laser Scanner
<b>UAV</b>	Unmanned Aerial Vehicle

## Acknowledgments

The research was funded by the project PONa3\_00016-RI- SAF@MED and PON03PE\_00090\_3, both included in the MIUR-MiSE National Operational Programme for Research and Competitiveness (PON R&C) 2007-2013, and co-funded by the European Regional Development Fund (ERDF).

## 1. References

- Abellán, A., Oppikofer, T., Jaboyedoff, M., Rosser, N.J., Lim, M., Lato, M.J., 2014. Terrestrial laser scanning of rock slope instabilities. *Earth Surf. Process. Landforms* 39, 80–97. <https://doi.org/10.1002/esp.3493>
- Achille, C., Adami, A., Chiarini, S., Cremonesi, S., Fassi, F., Fregonese, L., Taffurelli, L., 2015. UAV-Based Photogrammetry and Integrated Technologies for Architectural Applications—Methodological Strategies for the After-Quake Survey of Vertical Structures in Mantua (Italy). *Sensors* 15, 15520–15539. <https://doi.org/10.3390/s150715520>
- Adam, J.-P., 1999. *Roman Building*. Routledge. <https://doi.org/10.4324/9780203984369>
- Adan, A., Huber, D., 2011. 3D Reconstruction of Interior Wall Surfaces under Occlusion and Clutter, in: 2011 International Conference on 3D Imaging, Modeling, Processing, Visualization and Transmission. IEEE, pp. 275–281. <https://doi.org/10.1109/3DIMPVT.2011.42>
- Antanavičiūtė, U., Obuchovski, R., Paršeliūnas, E.K., Popovas, M.G.D., Šlikas, D., 2013. Some issues regarding the calibration of the terrestrial laser scanner Leica Scanstation C10. *Geod. Cartogr.* 39, 138–143. <https://doi.org/10.3846/20296991.2013.840356>
- Arayici, Y., 2008. Towards building information modelling for existing structures. *Struct. Surv.* 26, 210–222. <https://doi.org/10.1108/02630800810887108>
- Bakirman, T., Bayram, B., Akpınar, B., Karabulut, M.F., Bayrak, O.C., Yigitoglu, A., Seker, D.Z., 2020. Implementation of ultra-light UAV systems for cultural heritage documentation. *J. Cult. Herit.* 44, 174–184. <https://doi.org/10.1016/j.culher.2020.01.006>
- Banfi, F., 2019. The integration of a scan-To-hbim process in bim application: The development of an add-in to guide users in autodesk revit. *ISPRS Ann. Photogramm. Remote Sens. Spat. Inf. Sci.* 42, 141–148. <https://doi.org/10.5194/isprs-Archives-XLII-2-W11-141-2019>
- Barreca, F., Modica, G., Di Fazio, S., Tirella, V., Tripodi, R., Fichera, C.R., 2017. Improving building energy modelling by applying advanced 3D surveying techniques on agri-food facilities. *J. Agric. Eng.* 48, 203–208. <https://doi.org/10.4081/jae.2017.677>
- Bastem, S.S., Cekmis, A., 2022. Development of historic building information modelling: a systematic literature review. *Build. Res. Inf.* 50, 527–558. <https://doi.org/10.1080/09613218.2021.1983754>
- Besl, P., McKay, N., 1992. A Method for Registration of 3-D Shapes. *IEEE Trans. Pattern Anal. Mach. Intell.* <https://doi.org/10.1109/34.121791>
- Borrmann, A., König, M., Koch, C., Beetz, J., 2018. Building Information Modeling: Why? What? How?, in: *Building Information Modeling*. Springer International Publishing, Cham, pp. 1–24.

[https://doi.org/10.1007/978-3-319-92862-3\\_1](https://doi.org/10.1007/978-3-319-92862-3_1)

- Brodu, N., Lague, D., 2012. 3D terrestrial lidar data classification of complex natural scenes using a multi-scale dimensionality criterion: Applications in geomorphology. *ISPRS J. Photogramm. Remote Sens.* 68, 121–134. <https://doi.org/10.1016/j.isprsjprs.2012.01.006>
- Cascone, G., Pennisi, P., Di Fazio, S., 1997. Edificios protoindustriales para la producción de vino en Sicilia los Palmentos y las bodegas del Etna desde el siglo XVII al XIX (Proto-industrial buildings for wine production in Sicily: the Palmenti and wine cellars since XVII to XIX centuries), in: *Informes de La Construcción*. pp. 61–76.
- Chatzistamatis, S., Kalaitzis, P., Chaidas, K., Chatzitheodorou, C., Papadopoulou, E.E., Tataris, G., Soulakellis, N., 2018. Fusion of TLS and UAV photogrammetry data for post-earthquake 3D modeling of a cultural heritage Church. *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci. - ISPRS Arch.* 42, 143–150. <https://doi.org/10.5194/isprs-archives-XLII-3-W4-143-2018>
- Chen, K., Lu, W., Peng, Y., Rowlinson, S., Huang, G.Q., 2015. Bridging BIM and building: From a literature review to an integrated conceptual framework. *Int. J. Proj. Manag.* 33, 1405–1416. <https://doi.org/10.1016/j.ijproman.2015.03.006>
- Cheng, L., Tong, L., Li, M., Liu, Y., 2013. Semi-automatic registration of airborne and terrestrial laser scanning data using building corner matching with boundaries as reliability check. *Remote Sens.* 5, 6260–6283. <https://doi.org/10.3390/rs5126260>
- Chiabrando, F., Sammartano, G., Spanò, A., 2016. Historical buildings models and their handling via 3D survey: from points clouds to user-oriented HBIM. *ISPRS - Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.* XLI-B5, 633–640. <https://doi.org/10.5194/isprsarchives-XLI-B5-633-2016>
- Cucchiaro, S., Fallu, D.J., Zhang, H., Walsh, K., Van Oost, K., Brown, A.G., Tarolli, P., 2020. Multiplatform-SfM and TLS Data Fusion for Monitoring Agricultural Terraces in Complex Topographic and Landcover Conditions. *Remote Sens.* 12, 1946. <https://doi.org/10.3390/rs12121946>
- De Luca, G., Silva, J.M.N., Cerasoli, S., Araújo, J., Campos, J., Di Fazio, S., Modica, G., 2019. Object-based land cover classification of cork oak woodlands using UAV imagery and Orfeo Toolbox. *Remote Sens.* 11. <https://doi.org/10.3390/rs11101238>
- Di Angelo, L., Di Stefano, P., Fratocchi, L., Marzola, A., 2018. An AHP-based method for choosing the best 3D scanner for cultural heritage applications. *J. Cult. Herit.* 34, 109–115. <https://doi.org/10.1016/j.culher.2018.03.026>
- Di Fazio, S., 2008. Archetipi, permanenze e tendenze innovative nell'evoluzione degli oleifici in Calabria tra il XVIII e il XX secolo., in: *MIBAC / Accademia Nazionale Delle Scienze, Contributi Alle Ricerche Sulla Scienza Nel Mezzogiorno Dopo l'Unità d'Italia*. pp. 133–158.
- Di Fazio, S., 1999. Rural architecture of Europe, the ECOVAST strategy, in: *Conference on the Future of Rural Buildings in Ulster*. Belfast UAHS - Ulster Architectural Heritage Society, pp. 42–54.
- Di Fazio, S., Fichera, C.R., Bonomo, G., 1999. Old factory buildings for the production of olive oil in Calabria. Current situation and conservation strategies, in: *8th International Scientific Conference "Theoretical and Practical Issues of Monument Preservation" on Vernacular Architectural Heritage*. Utilitas Publisher, Tusnad, pp. 103–108.
- Di Fazio, S., Modica, G., 2018. Historic Rural Landscapes: Sustainable Planning Strategies and Action Criteria. The Italian Experience in the Global and European Context. *Sustainability* 10,



3834. <https://doi.org/10.3390/su10113834>

- Di Fazio, S., Modica, G., Fichera, C.R., 2016. ArcheOILogy: a Spatial Data Infrastructure For The Integrated Management of The Historic Landscape and Heritage Related to Olive-Oil Production in Calabria (Italy), in: UNISCAPE En-Route – a. I – n. 4.
- Diara, F., 2022. HBIM Open Source: A Review. *ISPRS Int. J. Geo-Information* 11. <https://doi.org/10.3390/ijgi11090472>
- Diara, F., Rinaudo, F., 2018. OPEN SOURCE HBIM FOR CULTURAL HERITAGE: A PROJECT PROPOSAL. *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.* XLII–2, 303–309. <https://doi.org/10.5194/isprs-archives-XLII-2-303-2018>
- Dore, C., Murphy, M., 2012. Integration of Historic Building Information Modeling (HBIM) and 3D GIS for recording and managing cultural heritage sites, in: 2012 18th International Conference on Virtual Systems and Multimedia. IEEE, pp. 369–376. <https://doi.org/10.1109/VSM2012.6365947>
- Dumitru, R., Borrmann, D., Nuchter, a, 2013. Interior Reconstruction Using the 3D Hough Transform. *3D-Arch 2013 XL*, 25–26. <https://doi.org/10.5194/isprsarchives-XL-5-W1-65-2013>
- Fan, L., Smethurst, J.A., Atkinson, P.M., Powrie, W., 2015. Error in target-based georeferencing and registration in terrestrial laser scanning. *Comput. Geosci.* 83, 54–64. <https://doi.org/10.1016/j.cageo.2015.06.021>
- Fryskowska, A., Stachelek, J., 2018. A no-reference method of geometric content quality analysis of 3D models generated from laser scanning point clouds for hBIM. *J. Cult. Herit.* 34, 95–108. <https://doi.org/10.1016/j.culher.2018.04.003>
- García, A.I., Ayuga, F., 2007. REUSE OF ABANDONED BUILDINGS AND THE RURAL LANDSCAPE: THE SITUATION IN SPAIN. *Am. Soc. Agric. Biol. Eng.* 50, 1383–1394.
- Givi, M., Cournoyer, L., Reain, G., Eves, B.J., 2019. Performance evaluation of a portable 3D imaging system. *Precis. Eng.* 59, 156–165. <https://doi.org/10.1016/j.precisioneng.2019.06.002>
- Granshaw, S.I., 2016. Photogrammetric Terminology: Third Edition. *Photogramm. Rec.* 31, 210–252. <https://doi.org/10.1111/phor.12146>
- Grimaldi, D.M., 1773. Istruzioni sulla nuova manifattura dell'olio introdotta nel Regno. R. Lanciano, Napoli.
- Heritage, G.L., Large, A.R.G., 2009. Laser scanning for the environmental sciences. Wiley-Blackwell, Chichester, UK ; Hoboken, NJ.
- ICOMOS, 1999. Charter on the built vernacular heritage., in: ICOMOS 12th General Assembly. Mexico.
- Ingman, M., Virtanen, J.-P., Vaaja, M.T., Hyypä, H., 2020. A Comparison of Low-Cost Sensor Systems in Automatic Cloud-Based Indoor 3D Modeling. *Remote Sens.* 12, 2624. <https://doi.org/10.3390/rs12162624>
- Ivanov, K., 2020. Digital three-dimensional architectural survey of traditional Bulgarian houses - Architectural BIM from point cloud survey data. *Conserv. Património.* <https://doi.org/10.14568/cp2019027>
- Jo, Y., Hong, S., 2019. Three-Dimensional Digital Documentation of Cultural Heritage Site Based on the Convergence of Terrestrial Laser Scanning and Unmanned Aerial Vehicle Photogrammetry. *ISPRS Int. J. Geo-Information* 8, 53. <https://doi.org/10.3390/ijgi8020053>

- Kaneda, A., Nakagawa, T., Tamura, K., Noshita, K., Nakao, H., 2022. A proposal of a new automated method for SfM/MVS 3D reconstruction through comparisons of 3D data by SfM/MVS and handheld laser scanners. *PLoS One* 17, e0270660. <https://doi.org/10.1371/journal.pone.0270660>
- Lague, D., Brodu, N., Leroux, J., 2013. Accurate 3D comparison of complex topography with terrestrial laser scanner: Application to the Rangitikei canyon (N-Z). *ISPRS J. Photogramm. Remote Sens.* 82, 10–26. <https://doi.org/10.1016/j.isprsjprs.2013.04.009>
- Lawrence, K.A., 2012. *Sensor and Data Fusion: A Tool for Information Assessment and Decision Making*, Second Edition. SPIE. <https://doi.org/10.1117/3.928035>
- Leanza, P., Porto, S., Sapienza, V., Cascone, S., 2016. A Heritage Interpretation-Based Itinerary to Enhance Tourist Use of Traditional Rural Buildings. *Sustainability* 8, 47. <https://doi.org/10.3390/su8010047>
- Logothetis, S., Delinasiou, A., Stylianidis, E., 2015. Building Information Modelling for Cultural Heritage: A review. *ISPRS Ann. Photogramm. Remote Sens. Spat. Inf. Sci.* II-5/W3, 177–183. <https://doi.org/10.5194/isprsannals-II-5-W3-177-2015>
- Logothetis, S., Stylianidis, E., 2016. BIM Open Source Software (OSS) for the documentation of cultural heritage. *Virtual Archaeol. Rev.* 7, 28. <https://doi.org/10.4995/var.2016.5864>
- Mandelli, A., Fassi, F., Perfetti, L., Polari, C., 2017. Testing different survey techniques to model architectonic narrow spaces. *ISPRS - Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.* XLII-2/W5, 505–511. <https://doi.org/10.5194/isprs-archives-XLII-2-W5-505-2017>
- Martínez-Carricondo, P., Carvajal-Ramírez, F., Yero-Paneque, L., Agüera-Vega, F., 2020. Combination of nadiral and oblique UAV photogrammetry and HBIM for the virtual reconstruction of cultural heritage. Case study of Cortijo del Fraile in Níjar, Almería (Spain). *Build. Res. Inf.* 48, 140–159. <https://doi.org/10.1080/09613218.2019.1626213>
- Mazzotti, M., 2004. Enlightened Mills: Mechanizing Olive Oil Production in Mediterranean Europe., in: *Technology and Culture*. The Johns Hopkins University Press, pp. 277–304.
- Meinen, B.U., Robinson, D.T., 2020. Mapping erosion and deposition in an agricultural landscape: Optimization of UAV image acquisition schemes for SfM-MVS. *Remote Sens. Environ.* 239. <https://doi.org/10.1016/j.rse.2020.111666>
- Messina, G., Praticò, S., Badagliacca, G., Di Fazio, S., Monti, M., Modica, G., 2021. Monitoring Onion Crop “Cipolla Rossa di Tropea Calabria IGP” Growth and Yield Response to Varying Nitrogen Fertilizer Application Rates Using UAV Imagery. *Drones* 5, 61. <https://doi.org/10.3390/drones5030061>
- Mill, T., Alt, A., Liias, R., 2013. COMBINED 3D BUILDING SURVEYING TECHNIQUES – TERRESTRIAL LASER SCANNING (TLS) AND TOTAL STATION SURVEYING FOR BIM DATA MANAGEMENT PURPOSES. *J. Civ. Eng. Manag.* 19, S23–S32. <https://doi.org/10.3846/13923730.2013.795187>
- Modica, G., De Luca, G., Messina, G., Praticò, S., 2021. Comparison and assessment of different object-based classifications using machine learning algorithms and UAVs multispectral imagery: a case study in a citrus orchard and an onion crop. *Eur. J. Remote Sens.* 54, 431–460. <https://doi.org/10.1080/22797254.2021.1951623>
- Moyano, J., Justo-Estebarez, Á., Nieto-Julián, J.E., Barrera, A.O., Fernández-Alconchel, M., 2022. Evaluation of records using terrestrial laser scanner in architectural heritage for information

- modeling in HBIM construction: The case study of the La Anunciación church (Seville). *J. Build. Eng.* 62, 105190. <https://doi.org/10.1016/j.job.2022.105190>
- Moyano, J., León, J., Nieto-Julián, J.E., Bruno, S., 2021. Semantic interpretation of architectural and archaeological geometries: Point cloud segmentation for HBIM parameterisation. *Autom. Constr.* 130, 103856. <https://doi.org/10.1016/j.autcon.2021.103856>
- Müller, P., Wonka, P., Haegler, S., Ulmer, A., Van Gool, L., 2006. Procedural modeling of buildings. *ACM Trans. Graph.* 25, 614. <https://doi.org/10.1145/1141911.1141931>
- Murphy, M., McGovern, E., Pavia, S., 2013. Historic Building Information Modelling – Adding intelligence to laser and image based surveys of European classical architecture. *ISPRS J. Photogramm. Remote Sens.* 76, 89–102. <https://doi.org/10.1016/j.isprsjprs.2012.11.006>
- Murphy, M., McGovern, E., Pavia, S., 2009. Historic building information modelling (HBIM). *Struct. Surv.* 27, 311–327. <https://doi.org/10.1108/02630800910985108>
- Oreni, D., Brumana, R., Della Torre, S., Banfi, F., Barazzetti, L., Previtali, M., 2014. Survey turned into HBIM: the restoration and the work involved concerning the Basilica di Collemaggio after the earthquake (L'Aquila). *ISPRS Ann. Photogramm. Remote Sens. Spat. Inf. Sci.* II-5, 267–273. <https://doi.org/10.5194/isprsannals-II-5-267-2014>
- Osello, A., Lucibello, G., Morgagni, F., 2018. HBIM and virtual tools: A new chance to preserve architectural heritage. *Buildings* 8, 1–12. <https://doi.org/10.3390/buildings8010012>
- Pärn, E.A., Edwards, D.J., Sing, M.C.P., 2017. The building information modelling trajectory in facilities management: A review. *Autom. Constr.* 75, 45–55. <https://doi.org/10.1016/j.autcon.2016.12.003>
- Picuno, P., 2012. Vernacular farm buildings in landscape planning: a typological analysis in a southern Italian region. *J. Agric. Eng.* 43, 20. <https://doi.org/10.4081/jae.2012.e20>
- Pocobelli, D.P., Boehm, J., Bryan, P., Still, J., Grau-Bové, J., 2018. BIM for heritage science: a review. *Herit. Sci.* 6, 30. <https://doi.org/10.1186/s40494-018-0191-4>
- Poloprutský, Z., 2019. Parametric Modelling for HBIM: Design of Window Library for Rural Building. *Stavební Obz. - Civ. Eng. J.* 28, 620–630. <https://doi.org/10.14311/cej.2019.04.0052>
- Poloprutský, Z., 2018. METRIC SURVEY DOCUMENTATION AS A BASIS FOR UNDERSTANDING THE DEVELOPMENT OF RURAL ARCHITECTURE. *Stavební Obz. - Civ. Eng. J.* 27, 48–59. <https://doi.org/10.14311/CEJ.2018.01.0005>
- Probst, J., Dritsas, K., Halazonetis, D., Ren, Y., Katsaros, C., Gkantidis, N., 2022. Precision of a Hand-Held 3D Surface Scanner in Dry and Wet Skeletal Surfaces: An Ex Vivo Study. *Diagnostics* 12, 2251. <https://doi.org/10.3390/diagnostics12092251>
- Quattrini, R., Malinverni, E.S., Clini, P., Nespeca, R., Orlietti, E., 2015. FROM TLS TO HBIM. HIGH QUALITY SEMANTICALLY-AWARE 3D MODELING OF COMPLEX ARCHITECTURE. *ISPRS - Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.* XL-5/W4, 367–374. <https://doi.org/10.5194/isprsarchives-XL-5-W4-367-2015>
- Rocha, Mateus, Fernández, Ferreira, 2020. A Scan-to-BIM Methodology Applied to Heritage Buildings. *Heritage* 3, 47–67. <https://doi.org/10.3390/heritage3010004>
- Rodríguez-Martín, Rodríguez-Gonzálvez, Ruiz de Oña Crespo, González-Aguilera, 2019. Validation of Portable Mobile Mapping System for Inspection Tasks in Thermal and Fluid–Mechanical Facilities. *Remote Sens.* 11, 2205. <https://doi.org/10.3390/rs11192205>

- Ruggiero, G., Parlavecchia, M., Dal Sasso, P., 2019. Typological characterisation and territorial distribution of traditional rural buildings in the Apulian territory (Italy). *J. Cult. Herit.* 39, 278–287. <https://doi.org/10.1016/j.culher.2019.02.012>
- Russhakim, N.A.S., Ariff, M.F.M., Majid, Z., Idris, K.M., Darwin, N., Abbas, M.A., Zainuddin, K., Yusoff, A.R., 2019. THE SUITABILITY OF TERRESTRIAL LASER SCANNING FOR BUILDING SURVEY AND MAPPING APPLICATIONS. *ISPRS - Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.* XLII-2/W9, 663–670. <https://doi.org/10.5194/isprs-archives-XLII-2-W9-663-2019>
- Salamanca, S., Cerrada, C., 2012. Filling holes in manifold digitized 3D meshes using image restoration algorithms. *Proc. 2012 IEEE Intell. Veh. Symp. Work.* 1–8.
- Santagati, C., Laurini, C.R., Sanfilippo, G., Bakirtzis, N., Papacharalambous, D., Hermon, S., 2019. HBIM FOR THE SURVEYING, ANALYSIS AND RESTORATION OF THE SAINT JOHN THE THEOLOGIAN CATHEDRAL IN NICOSIA (CYPRUS). *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.* XLII-2/W11, 1039–1046. <https://doi.org/10.5194/isprs-archives-XLII-2-W11-1039-2019>
- Saptari, A.Y., Widyastuti, R., Hamdani, -, 2022. Various High Density Point Cloud Registration Results Analysis in Heritage Building (Penataran Temple, Penglipuran Village, Bali). *Int. J. Adv. Sci. Eng. Inf. Technol.* 12, 2046. <https://doi.org/10.18517/ijaseit.12.5.15654>
- Schürch, P., Densmore, A.L., Rosser, N.J., Lim, M., McArdell, B.W., 2011. Detection of surface change in complex topography using terrestrial laser scanning: application to the Illgraben debris-flow channel. *Earth Surf. Process. Landforms* 36, 1847–1859. <https://doi.org/10.1002/esp.2206>
- Serafin, J., Grisetti, G., 2017. Using extended measurements and scene merging for efficient and robust point cloud registration. *Rob. Auton. Syst.* 92, 91–106. <https://doi.org/10.1016/j.robot.2017.03.008>
- Solano, F., Modica, G., Praticò, S., Box, O.F., Piovesan, G., 2022. Unveiling the complex canopy spatial structure of a Mediterranean old-growth beech (*Fagus sylvatica* L.) forest from UAV observations. *Ecol. Indic.* 138, 108807. <https://doi.org/10.1016/j.ecolind.2022.108807>
- Stumpf, A., Malet, J.-P., Allemand, P., Pierrot-Deseilligny, M., Skupinski, G., 2015. Ground-based multi-view photogrammetry for the monitoring of landslide deformation and erosion. *Geomorphology* 231, 130–145. <https://doi.org/10.1016/j.geomorph.2014.10.039>
- Thomson, C., Boehm, J., 2015. Automatic Geometry Generation from Point Clouds for BIM. *Remote Sens.* 7, 11753–11775. <https://doi.org/10.3390/rs70911753>
- Ursini, A., Grazzini, A., Matrone, F., Zerbinatti, M., 2022. From scan-to-BIM to a structural finite elements model of built heritage for dynamic simulation. *Autom. Constr.* 142, 104518. <https://doi.org/10.1016/j.autcon.2022.104518>
- Vacca, G., Dessì, A., Sacco, A., 2017. The Use of Nadir and Oblique UAV Images for Building Knowledge. *ISPRS Int. J. Geo-Information* 6, 393. <https://doi.org/10.3390/ijgi6120393>
- Volk, R., Stengel, J., Schultmann, F., 2014. Building Information Modeling (BIM) for existing buildings — Literature review and future needs. *Autom. Constr.* 38, 109–127. <https://doi.org/10.1016/j.autcon.2013.10.023>
- Warrick, J.A., Ritchie, A.C., Adelman, G., Adelman, K., Limber, P.W., 2017. New Techniques to

- Measure Cliff Change from Historical Oblique Aerial Photographs and Structure-from-Motion Photogrammetry. *J. Coast. Res.* 33, 39. <https://doi.org/10.2112/JCOASTRES-D-16-00095.1>
- Westoby, M.J., Brasington, J., Glasser, N.F., Hambrey, M.J., Reynolds, J.M., 2012. “Structure-from-Motion” photogrammetry: A low-cost, effective tool for geoscience applications. *Geomorphology* 179, 300–314. <https://doi.org/10.1016/j.geomorph.2012.08.021>
- Williams, J.G., Anders, K., Winiwarter, L., Zahs, V., Höfle, B., 2021. Multi-directional change detection between point clouds. *ISPRS J. Photogramm. Remote Sens.* 172, 95–113. <https://doi.org/10.1016/j.isprsjprs.2020.12.002>
- Xia, S., Guo, S., Li, J., Istook, C., 2019. Comparison of different body measurement techniques: 3D stationary scanner, 3D handheld scanner, and tape measurement. *J. Text. Inst.* 110, 1103–1113. <https://doi.org/10.1080/00405000.2018.1541437>
- Xu, Z., Wu, L., Shen, Y., Li, F., Wang, Q., Wang, R., 2014. Tridimensional reconstruction applied to cultural heritage with the use of camera-equipped UAV and terrestrial laser scanner. *Remote Sens.* 6, 10413–10434. <https://doi.org/10.3390/rs61110413>
- Yang, S., Xu, S., Huang, W., 2022. 3D Point Cloud for Cultural Heritage: A Scientometric Survey. *Remote Sens.* 14, 5542. <https://doi.org/10.3390/rs14215542>
- Zhao, X., 2017. A scientometric review of global BIM research: Analysis and visualization. *Autom. Constr.* 80, 37–47. <https://doi.org/10.1016/j.autcon.2017.04.002>